

LED Spot MR16 / LED Spot MR16

Hoher CRI Wert, volles sonnenlichtähnliches Spektrum – Hohe Lichtausbeute, flickerfrei

- Bestückt mit Sonnenspektrum LED
- Hohe Lichtausbeute 90 lm/W
- Hoher CRI Wert Ra 98
- Sockel MR16
- Applikationen:
Haushalt, Büro, Hotel, Gewerbe
- Beste naturgetreue Farbwiedergabe
- Flickerfrei
- 3 Stufen Dimmung: 100 %, 40 %, 15 %

Spezifikationen


Produkt	
Nennleistung	6 W
Abmessungen	∅ 50 x 52 mm
Farbtemperatur	2700 K warmweiss
Farbwiedergabeindex	Ra 98
Nennlichtstrom	> 500 lm
Effizienz	~ 90 lm / W
Gewicht	35 g
Lebensdauer	> 30,000 hours
Betriebsspannung	230V AC @ 50 Hz / 60 Hz
Gehäusematerial	UL94-5VA
Betriebstemperatur	-20 °C ~ +40 °C
Flicker	< 2,5 %
Dimmbar	3 Stufen Dimmung

High CRI, Full spectrum natural light, High luminous efficacy, Long life-span, Flicker free


- Fitted with Sunspecrum LED
- Luminous efficacy 90 lm/W
- High CRI (Ra 98), High-visibility light
- Base MR16
- Applications:
Home, Commercial, Hotel, Office
- High natural color reproduction
- Flickering-free
- 3 Step Dimming: 100 %, 40 %, 15 %

Specifications


Products	
Power Consumed	6 W
Size	∅ 50 x 52 mm
CCT	2700 K warm-white
CRI	Ra 98
Total Lumen	> 500 lm
Efficacy	~ 90 lm / W
Weight	35 g
Life-span	> 30,000 hours
Input Voltage	230V AC @ 50 Hz / 60 Hz
Body (Heat Sink)	UL94-5VA
Operating Temperature	-20 °C ~ +40 °C
Flicker	< 2,5 %
Dimmable	3 Step Dimming

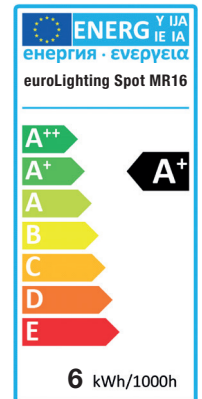


Lichtspektrum / Light spectrum

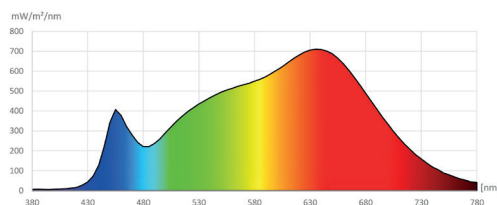

Lichtverteilungskurve Light Distribution Curve

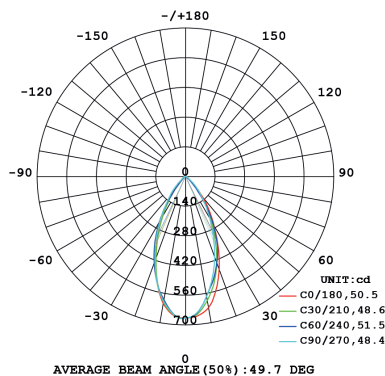

Abmessungen (mm) Dimensions (mm)



Alle technische Änderungen und Irrtümer vorbehalten!
All technical changes and mistakes reserved!